

P10j TR

Part number: 1007762 (black), 1007802 (white/RAL)

The HK Audio P10j TR is a high performance column speaker loaded with 10 x 3" fullrange drivers with a built-in 100/70 V transformer for demanding installations.

The P10j TR has an asymmetrical opening angle of 120° x 15° (horizontal x vertical). The power taps of the built-in transformer are 150 W/ 75 W/ 37.5 W at 100 V.

The electrical connection is made via two 4-pin plug connectors, which are protected by a cover plate with PG cable glands. The electrical impedance of the P10i TR is 175, 85 or 43 ohms depending on the power tap.


Overall, the P10j TR achieves protection class IP 66 (EN 60529) and is therefore suitable for outdoor installations. For use in unprotected outdoor areas, a PU (polyurethane) coating is required.

All P10 loudspeakers are certified according to EN 54-24:2008 (type B outdoor) and can therefore be used in voice alarm systems. Here they ideally fulfil a dual function - both for sound reinforcement purposes and for alerting in case of fire or emergency (PA/VA).

Moreover, a certification in accordance with DIN 18032-3 is provided which proves the ball impact resistance (for example for installations in sports facilities).


Characteristics:

- High max. SPL of up to 124 dB thanks to specially developed high-performance 3 transducers
- Fully outdoor-suitable cabinet construction with very high protection class
- Asymmetrical vertical opening angle for large rooms with long reverberation times or for outdoor long-throw applications
- Suitable for environments with high noise levels, such as sports facilities or entrance halls
- Neutral voicing for applications where high-quality speech transmission is important, such as lecture and conference rooms or houses of worship
- Combination with additional P10s leads to increased range and max. SPL
- Over 30 colours for visual adaptation ex works for use in demanding environments
- Wide range of mounting accessories for installations on walls, ceilings and columns
- Frequency response equalization with DSP settings based on Lab.gruppen IPD/IPX, Lake, Powersoft Armonia+, QSC Q-SYS or in table form

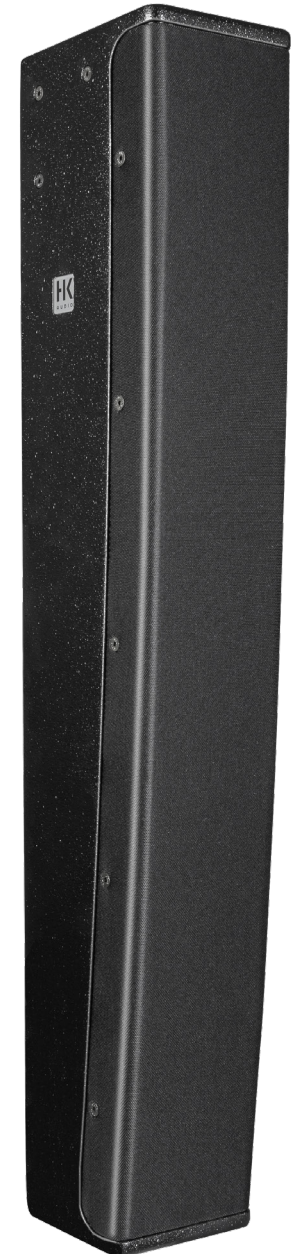


Technical data


P10j TR	
Power tap 1 at 70 V	75 W W
Power tap 2 at 70 V	37.5 W
Power tap 3 at 70 V	19 W
Sensitivity 1 W/1 m (full space)	97 dB (200 Hz - 10 kHz)
Frequency response +/- 3 dB (processed)	155 Hz - 18 kHz
Frequency response -10 dB (processed)	130 Hz - 19 kHz
Max. SPL @ 10 % THD (EN 60268-21, full space)	124 dB
Directivity (horizontal x vertical)	120° x 15° (asymmetrical, j-shaped)
Electrical impedance	175/85/43 ohms
Low/mid transducer	10 x 3" fullrange drivers with ferrite magnet and 0.8" voice coil
High frequency driver	not applicable
Crossover/cut-off frequency	not applicable
DSP filters	Filters for Lab.gruppen IPD/IPX and Lake, Powersoft Armonia+, QSC Q-SYS and filters in tabular form
Connections	2 x 4-pole connectors
Mounting points	24 x M5
Cabinet material	Birch plywood
Front grille	Ball impact resistant steel grille, powder coated, with acoustic fabric (dirt and water repellent)
Finish	Two-component coating, black and white as standard, over 30 colors possible
Protection class (IP code EN 60529)	IP 66
Optional accessories	U-bracket, swivel and tilt bracket, rigging rail, pole support and ceiling mount
Dimensions (W x H x D)	120 x 820 x 165 (top) and 119 (bottom) mm
Weight	10.8 kg

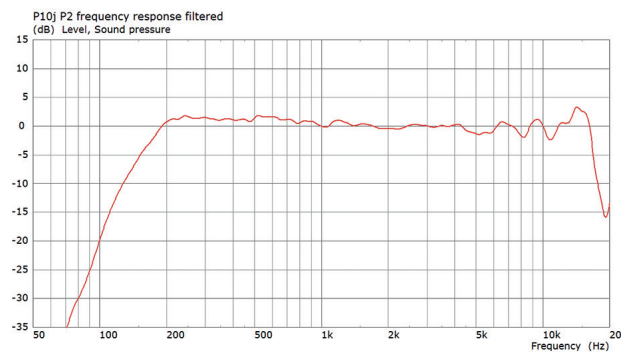


Frequency response (processed)

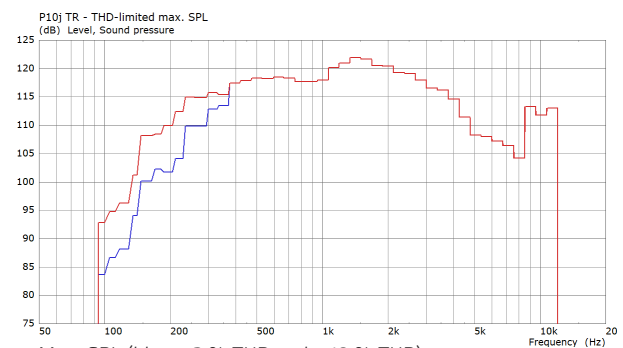

Max. SPL (blue = 3 % THD, red = 10 % THD)

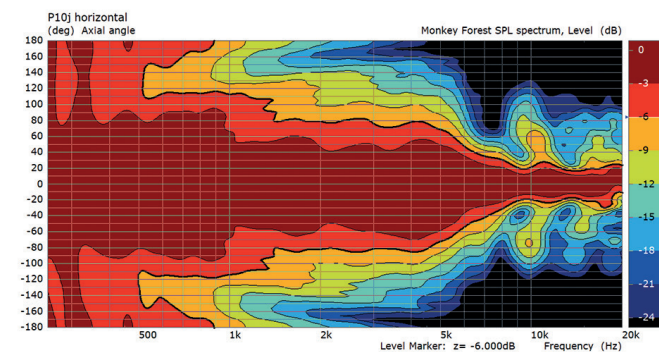

Horizontal directivity

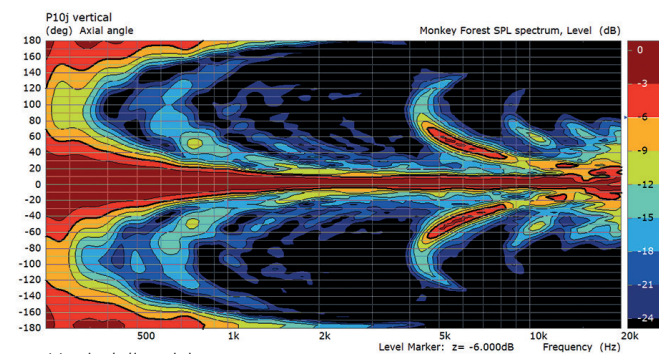

Vertical directivity

EN 54 certified


P10i	
Rated noise power (EN 54-Signal)	150 W
Sound pressure level 1 W/4 m	80 dB
Max. SPL (Rated power/4 m/EN 54-Signal)	102 dB

Mounting accessories

U-bracket

Part number: 1007805 (black), 1007806 (white/RAL)


A single P10 speaker can be mounted using the U-bracket supplied as standard. The U-bracket can be hooked into M8 mounting points thanks to its keyhole openings. It can also be mounted at four additional screw connection points.



Rigging Rail

Part number: 1007811 (black), 1007812 (white/RAL)


Wherever installation with a large distance to the wall is necessary or where no sufficiently load-bearing walls are available, the P10 can also be operated in a hanging position. The desired tilt angle can be preset by choosing a suspension point along the rail. Up to three P10s can be supported by the rigging rail. A separate attachment point allows the loudspeakers to be braced, secure them against twisting or set to the desired tilt angle.



Connector plates

Part number: 1007803 (black), 1007804 (white/RAL)


The P10 connector plates provide a mechanical connection between two P10 speaker cabinets. This can be useful, for example, in column systems arranged one above the other to facilitate joint pivoting and alignment to the desired room areas. The connector plates are also necessary for mounting several P10s together on a rigging rail.



Swivel and tilt bracket for one loudspeaker

Part number: 1007807 (black), 1007808 (white/RAL)


For applications requiring precise alignment and inclination to the audience areas, the swivel and tilt brackets are used. The adjustable tilt angle aligns speakers to provide satisfying sound reinforcement results even in acoustically challenging venues, such as rooms with highly reflective facing walls.



Swivel and tilt bracket for two loudspeaker

Part number: 1007809 (black), 1007810 (white/RAL)


For applications requiring precise alignment and tilting to the surfaces to be covered, the large pan and tilt mounts are used, which support two speakers at a common mounting point. With the resulting sharp directivity, very difficult rooms can be sound reinforced successfully.



Ceiling mount

Part number: 1007815 (black), 1007816 (white/RAL)


A suitable ceiling bracket is available for mounting on a ceiling and subsequent alignment with the audience areas below. The concealed cable routing in the tube as well as the wide pan and tilt range allow the implementation of a high-quality sound reinforcement system even in difficult rooms.




Pole support

Part number: 1007813 (black), 1007814 (white/RAL)

Speakers often need to be mounted on poles, columns, masts or trusses. The P10 pole support serves this purpose. Bolted to the housing, it provides a suitable support for poles or columns with standard diameters. Hose clamps or clips may be used to attach the mounts, a practical solution in listed buildings where drilling holes is not an option.



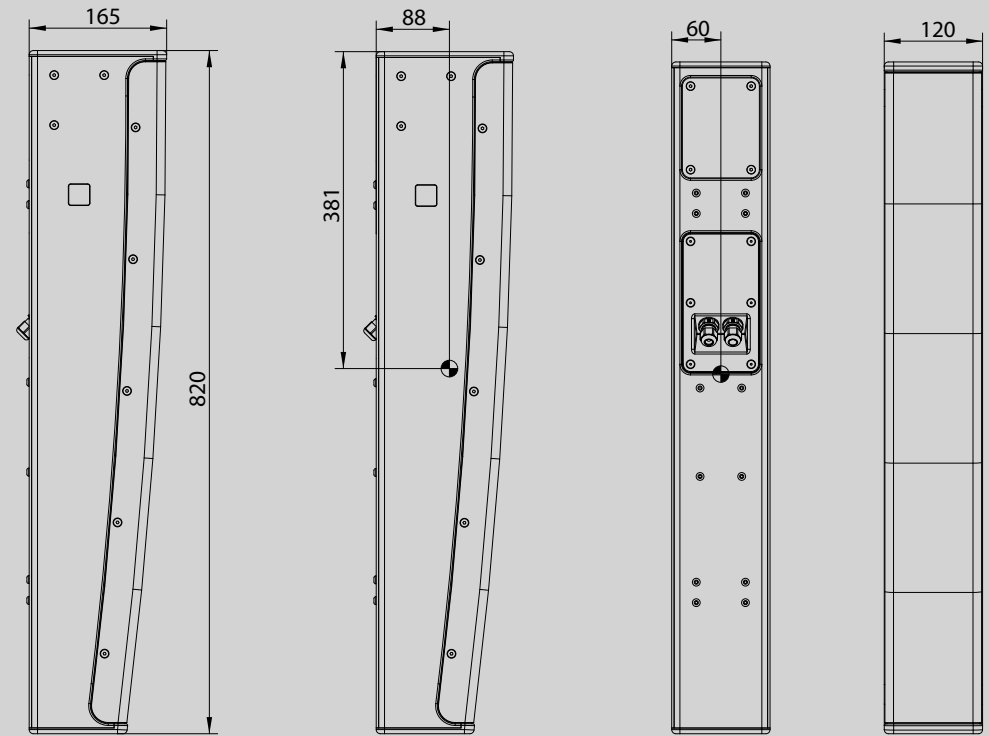

HK Audio
Postfach 1509
66595 St. Wendel, Germany

info@hkaudio.com
fax +49-68 51-905 215
www.hkaudio.com
D-3231